



DS0002-SU *DevBoard*

*Development System
with RS232 and USB
interfaces*

TABLE OF CONTENTS

- General Description.....3**
- Main Board.....4**
 - Battery Compartment.....4
 - Power Source Jumper.....4
 - Schematics.....5
 - PCB Layout.....5
 - Controller Connectors.....6
 - CLK.....6
 - SW.....6
 - DAT.....6
 - CTRL.....7
 - USB.....7
 - RS232.....7
- Key Matrix.....8**
 - Schematics.....9
 - PCB Layout.....9
- Controller Board.....10**
 - Schematics.....11
 - PCB Layout.....11
- Notices.....12**
 - Copyright Notice.....12
 - Technical Notice.....12
 - Warranty Disclaimer.....12
- Ordering Information.....13**
- Change History.....13**


GENERAL DESCRIPTION

The DS0002 DevBoard is a development system for rapid prototyping and proof-of-concept verification. The standard DevBoard configuration consists of a Main Board, Key Matrix for two Sxnnnn switches and CC0064 controller.


The Main Board provides 5V power from 2 AA batteries or via the USB port (jumper selectable) and RS232 or USB2.0 interface via D-Sub 9-pin or USB-B Mini connectors.

The Key Matrix connectors accept either a KM0201 with two Sxnnnn switches or a KM0008 cable module for eight Sxnnnn switches connected via ribbon cables.

The CC0064 controller is a standard panel controller for up to 64 Sxnnnn switches with RS232 and USB2.0 interfaces.

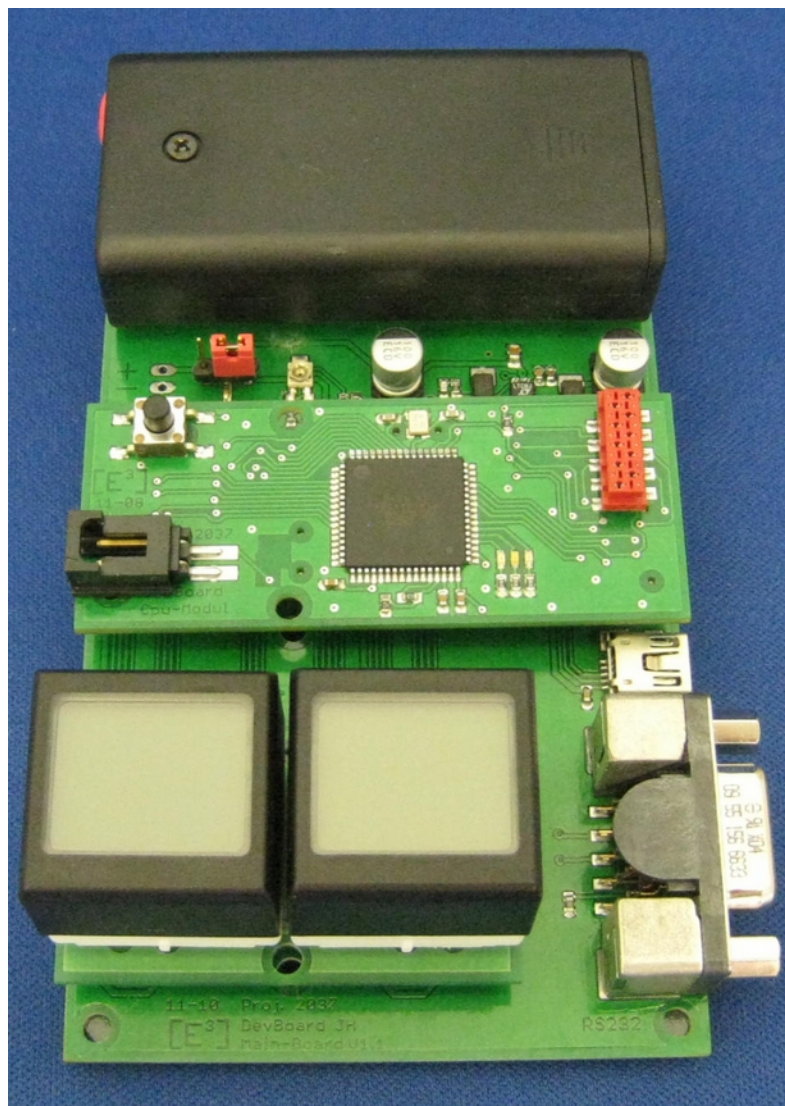

MAIN BOARD

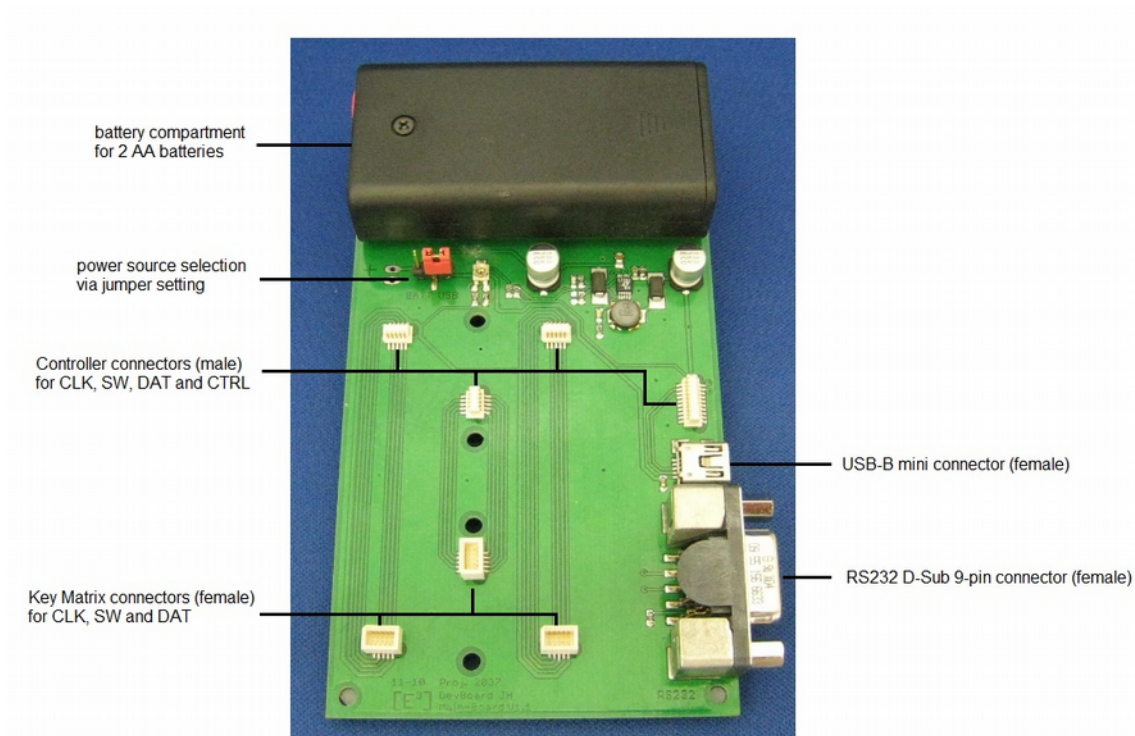


Battery Compartment

The DevBoard's battery compartment accepts two AA batteries to provide power for the controller and 2 Sxxxxn switches. The ON/OFF switch is located on the bottom side of the Main Board.



Power Source Jumper

The DevBoard allows you to select between the battery compartment, direct power input (via marked power terminals) or USB port as power sources. The Power Source Jumper setting will determine which power source is used.



Acceptable input voltage for USB port is 5 V, for battery/direct power input 2.0V - 5.5V.

The schematic diagram illustrates the internal circuitry of the 2037 DevBoard. It features a USB-to-serial interface using a CH340G chip, powered by a 5V regulator (U1) and a 3.3V regulator (U2). The board includes a USB connector (X1) and a USB-to-serial connector (X2). The power supply section includes a 5V regulator (U1) and a 3.3V regulator (U2). The USB-to-serial interface is implemented using a CH340G chip (U3). The board also includes a USB connector (X1) and a USB-to-serial connector (X2). The power supply section includes a 5V regulator (U1) and a 3.3V regulator (U2). The USB-to-serial interface is implemented using a CH340G chip (U3).

Projekt		Version	
2037 DevBoard		1.0	
Zeichnung		Stand	
U1: 18.10.2010 Hasser		U1: 18.10.2010 Hasser	
U2: 14.05.2010 Hasser		U2: 14.05.2010 Hasser	
Stand		Status	
Name		Name	
Datum		Blatt	
06.12.11 11:03		1/1	



Controller Connectors

The Main Board accepts a standard CC0064 controller via shrouded pin headers with connections for CLK clock signals, SW switch contacts, DAT data lines and CTRL communication controls for the interfaces.

The connectors for CLK, SW and DAT are mirrored (female) on the Main Board to accept Key Matrix boards. This allows the CC0064 controller to accept the same KM0201 key matrix resulting in a smaller footprint with the same functionality. This configuration requires 5V external power source.

Please find the pin-outs for each pin header in the tables below:

CLK

Function	Pin	Pin	Function
GND	1	2	Clock7
Clock6	3	4	Clock5
Clock4	5	6	Clock3
Clock2	7	8	Clock1
Clock0	9	10	5V

SW

Function	Pin	Pin	Function
GND	1	2	Switch7
Switch6	3	4	Switch5
Switch4	5	6	Switch3
Switch2	7	8	Switch1
Switch0	9	10	5V

DAT

Function	Pin	Pin	Function
GND	1	2	Data7
Data6	3	4	Data5
Data4	5	6	Data3
Data2	7	8	Data1
Data0	9	10	5V

CTRL

Function	Pin	Pin	Function
GND	1	2	RS232 - Tx
USB - DM	3	4	RS232 - Rx
USB - DP	5	6	V11 - Tx
PSU - PWM	7	8	V11 - Rx
SPI - MISO	9	10	NC
SPI - MOSI	11	12	NC
SPI - SCK	13	14	NC
SPI - SS	15	16	NC
TWI - SDA	17	18	NC
TWI - SCL	19	20	5V

USB



Pin	Function
1	VCC
2	D-
3	D+
4	
5	GND

RS232

Pin	Function
1	
2	Rx
3	Tx
4	
5	GND
6	
7	
8	
9	


KEY MATRIX

The DevBoard standard configuration has a KM0201 key matrix with two Sxnnnn switches.

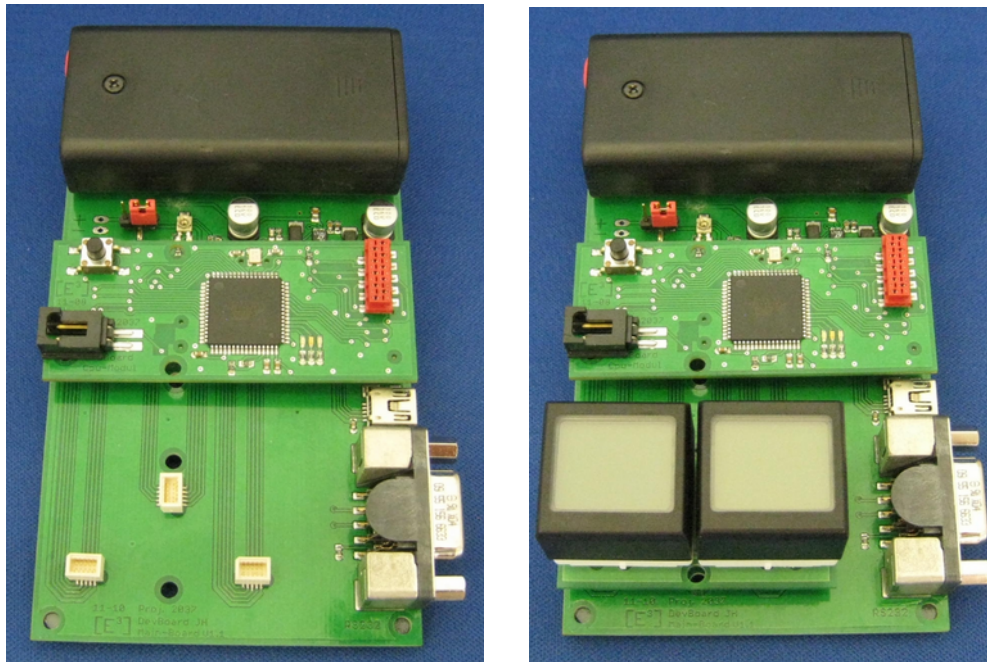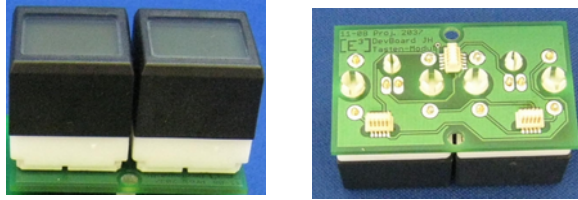


Alternatively, the DevBoard Main Board also accepts a KM0008 key matrix with connections for eight Sxnnnn switches via ribbon cables for panel-mount application.

Schematics

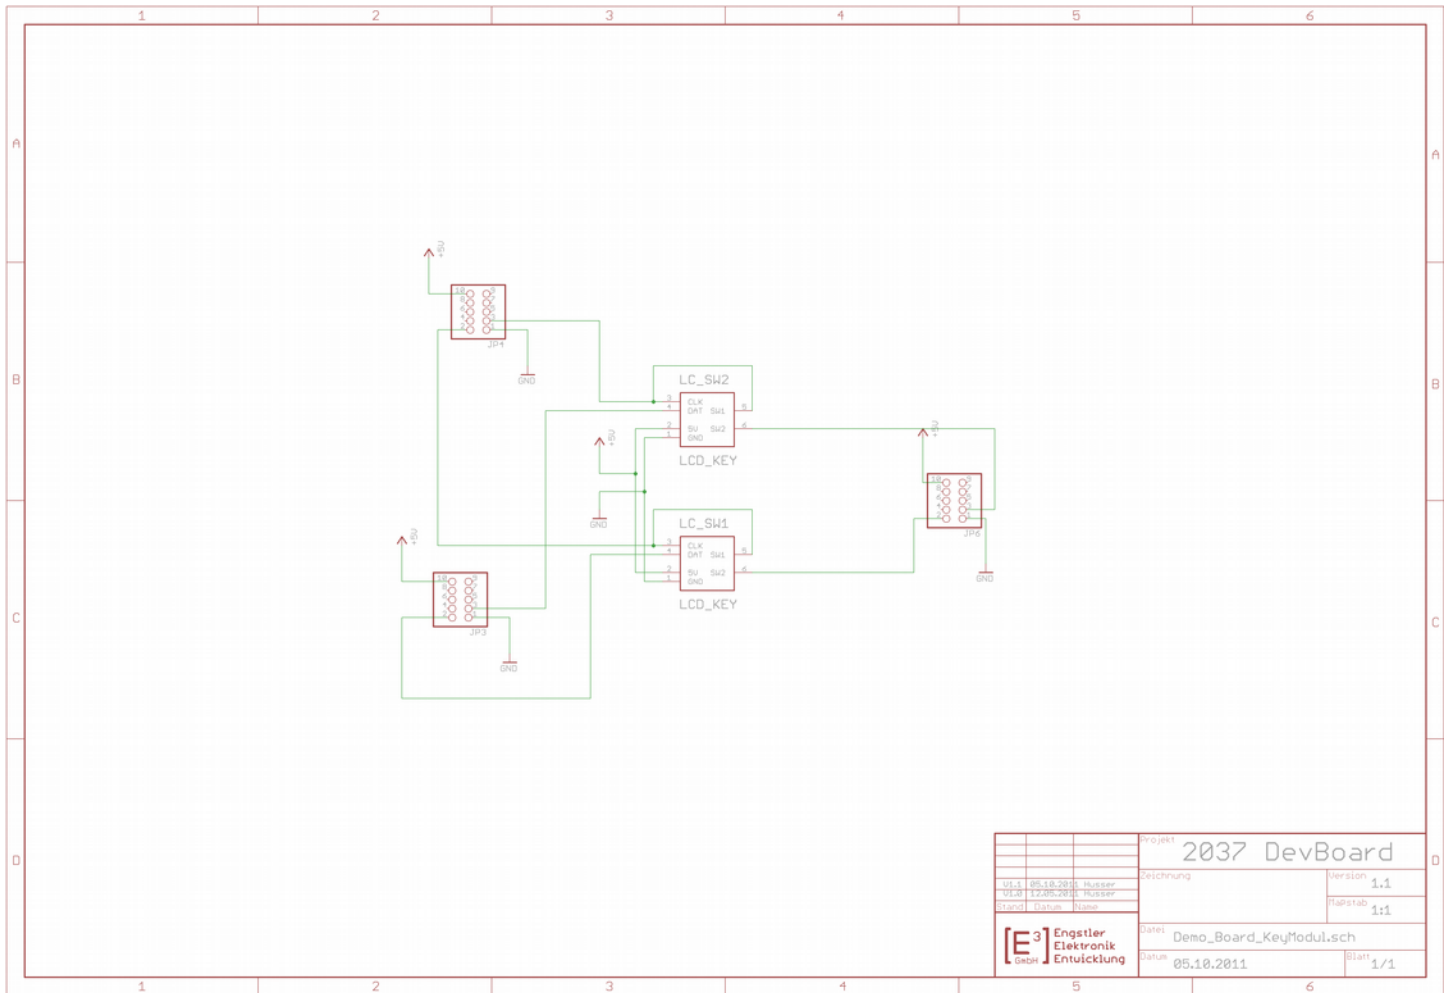


PCB Layout

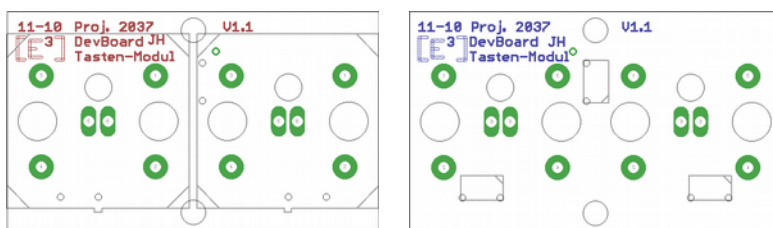


CONTROLLER BOARD

The DevBoard is controlled via a standard CC0064 controller capable of controlling up to 64 Sxnnnn switches.


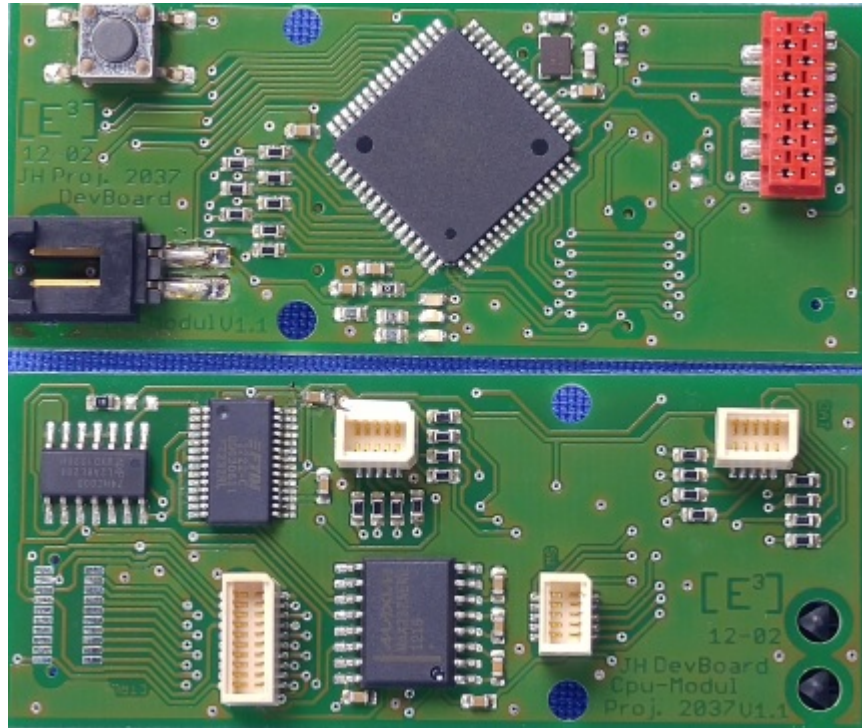


For a detailed description of the CC0064 controller and the corresponding Command Set, please download the [CC0064 User Manual](#).

Schematics

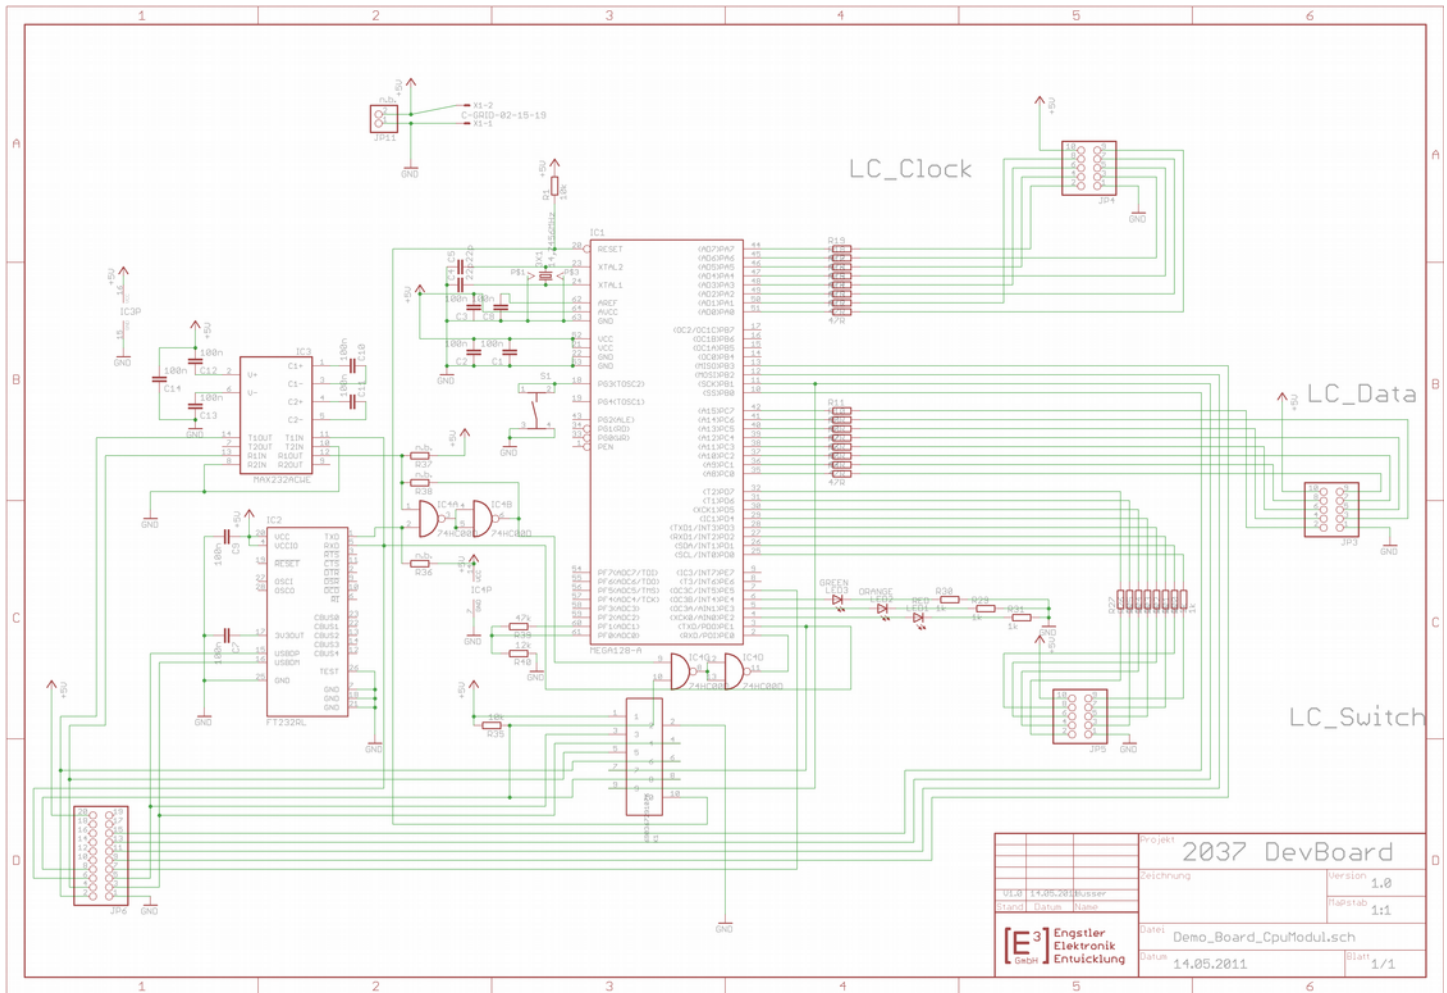

PCB Layout

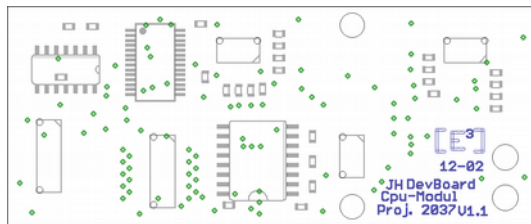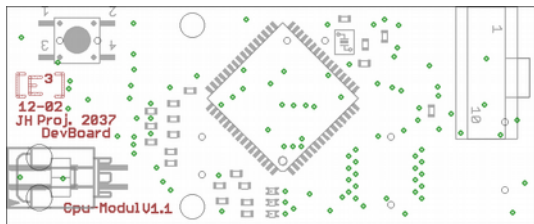

NOTICES

Copyright Notice

© 2013-2024 Copyright [E³] Engstler Elektronik Entwicklung GmbH. All rights reserved.

[E³], *The Third Evolution*™ and *Legacy Mode*™ are trademarks of [E³]. *The Keys to Intelligence*™ is a trademark of I/O Universal Technologies, Inc. used with permission. All other trademarks are property of their respective owners.

No part of this publication may be copied, photocopied, reproduced, translated or reduced to any electronic medium or machine-readable form without the expressed written consent of [E³] Engstler Elektronik Entwicklung GmbH.

Technical Notice

This datasheet is intended for technically qualified personnel trained in the field of electronics.

The knowledge of electronics and the technically correct implementation of the content of this datasheet are required for problem free installation, implementation and safe operation of the described product. Only qualified personnel have the required know-how to implement the specifications given in this data sheet.

For clarity, not all details regarding the product or its implementation, installation, operation, or maintenance have been included. Should you require additional information or further assistance, please contact your local [E³] distributor or [E³] Engstler Elektronik Entwicklung GmbH at techsupport@e3-keys.com. You may also visit our website at www.e3-keys.com.

Warranty Disclaimer

[E³] ENGSTLER ELEKTRONIK ENTWICKLUNG GMBH grants no warranty with respect to this data sheet, neither explicit nor implied, and it is not liable for direct or indirect damages. Some states do not grant the exclusion of incidental or consequential damages and, therefore, this statement may not be valid in such cases.

This data sheet has been produced with all due care. However, since errors cannot be excluded, [E³] Engstler Elektronik Entwicklung GmbH does not grant any warranty or accept any legal responsibility or liability in any form for erroneous statements herein.

ORDERING INFORMATION

Part Number	Description
DS0002	DevBoard development system (standard configuration)
CC0064-SU	CP controller board with RS232, V11 and USB2.0 interfaces for up to 64 Sxxxxx switches
MB0001	Power and interface board for DevBoard configuration
KM0201	Key matrix for 2 Sxxxxx switches (standard DevBoard configuration)
KA0008	Key Accessory matrix for 8 Sxxxxx switches connected via ribbon cables
SB6432	Programmable LCD keyswitch with 64x32 pixel resolution and RGB backlighting

CHANGE HISTORY

Version	Date	Comments
0.1	03/28/13	Initial draft document
1.0	09/09/14	Minor document edits
1.1	07/14/20	New Formatting
1.2	01/18/22	Schematics added; KA0008 description updated
2.0	06/16/22	Updated release document
2.1	10/09/24	New corporate address

[E³] Engstler Elektronik Entwicklung GmbH
Auweg 27 • 63920 Grossheubach • Germany

WWW.E3-KEYS.COM